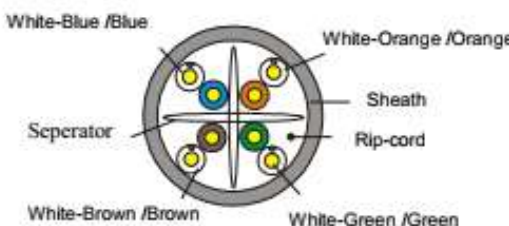


Category 6 U/UTP Cable, 24AWG, low smoke zero halogen, blue jacket, 4 pair count, 500 m length Reel in drum

Product Specifications

Product Description: Rated temperature: 90°C Reference Standard:UL444,UL1581 Bare solid copper conductor Rohs/REACH complied LSZH Jacket Flame Test: IEC60332-1 ,IEC60332-3C Installation temperature:-30°C ~+50°C				Application: 100Base-TX 100Base-T 100VG-AnyLAN 1000Base-T(Gigabit Ethernet) 1000Base-TX ATM Noisy Environments																								
Content of the Data Sheet																												
Category	U/UTP CAT6-4P-LSZH																											
Test Standard	ISO/IEC11801, TIA-568-C.2, YD/T1019																											
Conductor	Material	Solid-Bare Copper																										
	Nom.O.D.(mm)	0.570	up -Max	+0.005																								
			down -Min.	-0.005																								
Insulation	Material	HDPE																										
	Diameter	1.02 ± 0.03mm																										
Sheath	Thickness	0.55 ± 0.05 mm																										
	External O.D.	6.3 ± 0.4 mm																										
	Surface	Clean, Frap, Satiation																										
	Material	LSZH																										
Surface Printing	Color	According to the requires																										
	Letter height	3.0 ± 0.3mm																										
	Color	Black																										
Print error & Space	≤ ± 0.5%, 1m																											
Core Color	1 White- Blue /Blue		2 White-Orange /Orange																									
	3 White-Green /Green		4 White- Brown /Brown																									
Packing	Wooden Tray & Carton																											
Carton dimension	40.5*40.5*21cm																											
Packing length	305 ± 1.5m																											
Rip-cord	Yes	Drain wire	No																									
																												
<table border="1"> <tr> <td rowspan="2">Sheath Physical Properties</td> <td>Before Aging</td> <td>Tensile Strength (Mpa)</td> <td>≥ 10.0</td> </tr> <tr> <td></td> <td>Elongation(%)</td> <td>≥ 125</td> </tr> <tr> <td></td> <td>Aging Period (°C × hrs)</td> <td colspan="2">100°C × 24h × 7d</td> </tr> <tr> <td></td> <td>After Aging</td> <td>Tensile Strength(Mpa)</td> <td>≥ 8.0</td> </tr> <tr> <td></td> <td></td> <td>Elongation(%)</td> <td>≥ 100</td> </tr> <tr> <td></td> <td colspan="3">Cold bend(-20±2°C ×4h) 8×Cable O.D., No visible cracks</td> </tr> </table>						Sheath Physical Properties	Before Aging	Tensile Strength (Mpa)	≥ 10.0		Elongation(%)	≥ 125		Aging Period (°C × hrs)	100°C × 24h × 7d			After Aging	Tensile Strength(Mpa)	≥ 8.0			Elongation(%)	≥ 100		Cold bend(-20±2°C ×4h) 8×Cable O.D., No visible cracks		
Sheath Physical Properties	Before Aging	Tensile Strength (Mpa)	≥ 10.0																									
		Elongation(%)	≥ 125																									
	Aging Period (°C × hrs)	100°C × 24h × 7d																										
	After Aging	Tensile Strength(Mpa)	≥ 8.0																									
		Elongation(%)	≥ 100																									
	Cold bend(-20±2°C ×4h) 8×Cable O.D., No visible cracks																											
<table border="1"> <tr> <td rowspan="6">Electrical Characteristics (20°C)</td> <td>1.0-250.0MHz</td> <td>Impedance (Ω)</td> <td>100 ± 15</td> </tr> <tr> <td>1.0-250.0MHz</td> <td>Delay Shew (ns/100m)</td> <td>≤ 45</td> </tr> <tr> <td></td> <td>NVP</td> <td>69%</td> </tr> <tr> <td></td> <td>Capacitance(nF/100m) max:</td> <td>5.6</td> </tr> <tr> <td></td> <td>DC Resistance (Ω/100m) max:</td> <td>9.5</td> </tr> <tr> <td></td> <td>DC Conductor Resistance Unbalance (%) max:</td> <td>5.0</td> </tr> </table>						Electrical Characteristics (20°C)	1.0-250.0MHz	Impedance (Ω)	100 ± 15	1.0-250.0MHz	Delay Shew (ns/100m)	≤ 45		NVP	69%		Capacitance(nF/100m) max:	5.6		DC Resistance (Ω/100m) max:	9.5		DC Conductor Resistance Unbalance (%) max:	5.0				
Electrical Characteristics (20°C)	1.0-250.0MHz	Impedance (Ω)	100 ± 15																									
	1.0-250.0MHz	Delay Shew (ns/100m)	≤ 45																									
		NVP	69%																									
		Capacitance(nF/100m) max:	5.6																									
		DC Resistance (Ω/100m) max:	9.5																									
		DC Conductor Resistance Unbalance (%) max:	5.0																									