




eLan Category 6 UTP patch cord blue RJ45, 1m

Product Specifications

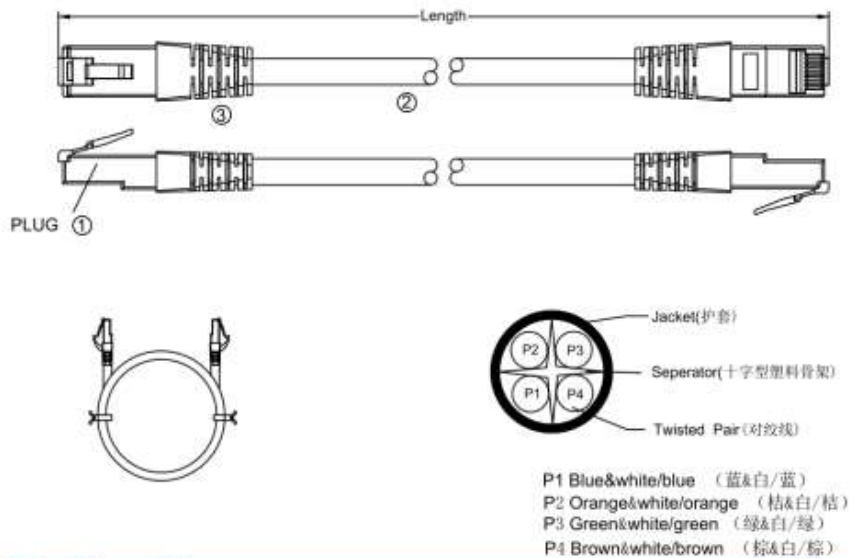

Product Description

Pin Assignment: 线位

Pos. No.	T568B WIRING 568B线位	Pos. No.
1	Orange E	1
2	White-Orange C/E	2
3	Green D	3
6	White-Green B/D	6
4	White-Blue A/D	4
5	Blue A	5
7	Brown F	7
8	White-Brown C/F	8

- All cable 100% channel testing, any open, missing wire, short and intermittent are not permitted.
- After crimping the distance between the bottom of contact and the top surface of plug are 5.90-6.146mm.
- The cable must be tested and passed the channel test with Fluke DSX-8000.
- Rohs compliant PVC or PE or LSZH Jacket.
- Installation temperature: -30°C to +50°C, minimum bending radius: 4D.

NO.	Item	QTY	Description
1	RJ45 PLUG	2 PCS	RJ45 SP8C Contact, phosphor Bronze 3u" . UL94V-0.
2	CABLE	1 PCS	CAT6. UTP 24AWG(7*0.18MM)*4P Stranded Cable Jacket. OD: 5.9±0.2MM
3	OVERMODE		4SP PVC